

AVIATOR 350

COBHAM

The most important thing we build is trust



**Single Channel
SwiftBroadband with
High Gain Antenna**

AVIATOR 350

Single Channel SwiftBroadband with High Gain Antenna



Small in size but big on performance and features, Cobham's AVIATOR 350 is an Inmarsat SwiftBroadband satcom solution like no other.



Enhanced Capability, Full Functionality

Cobham's AVIATOR 350 is a complete communications solution that brings all the functionality you need for a wide range of applications such as corporate, air transport, government, military or special missions use.

AVIATOR 350 comes with a range of embedded features such as:

- Inmarsat SwiftBroadband channel for simultaneous data and voice
- Extremely compact and lightweight
- Up to 8 simultaneous voice calls
- Internet access
- Email with full attachments
- Fax capable
- Smartphone and tablet connectivity
- Built-in router option for intelligent connectivity support and multiple user support
- Built-in Ethernet switch for supporting numerous wired laptops and/or EFBs
- Built-in wireless access point (optional) for supporting numerous wireless laptops, tablets and/or smartphones

- Built-in PBX for supporting numerous handsets and in-plane calls
- ARINC 741/781 antenna compatibility
- ISDN connectivity
- Supports all current standards for secure voice and data transmission (FNBDT, STE, STU, HAIPE, etc.)

High Gain Antenna (HGA)

For users requiring the highest performance from their SwiftBroadband service, the AVIATOR 350 system utilizes a High Gain Antenna (HGA) providing data rates of up to 432 kbps. For more information on antenna options available, please contact your Cobham sales representative.

SB X-Stream Service


The Inmarsat SB X-Stream service provides streaming data at rates above 256Kbps, enabling higher quality of service and more data to be streamed at a faster rate. SB X-Stream supports a wide-range of applications requiring a steady data flow including video streaming and inputs from various sensors.

**Strong Foundation -
More Possibilities**

The core unit of Cobham's SwiftBroadband systems, the SwiftBroadband Unit (SBU), has an optional built-in wireless access point for easy connection of laptops, Smartphones, tablets or VoIP handsets. The optional built-in router makes it easy to connect up to 6 laptops and the ISDN interface can be connected to phones, routers, PCs or secure devices.

Two 2-wire interfaces enable the connection of standard or wireless handsets, fax machines, headset interface boxes and so on.

The detachable configuration modules contain all settings making it very easy to replace the combined High Power Amplifier (HPA), Low Noise Amplifier and Diplexer (HLD) or SwiftBroadband Unit (SBU). ARINC 741/781 compatibility ensures a straightforward interface to many High Gain Antennas (HGA).

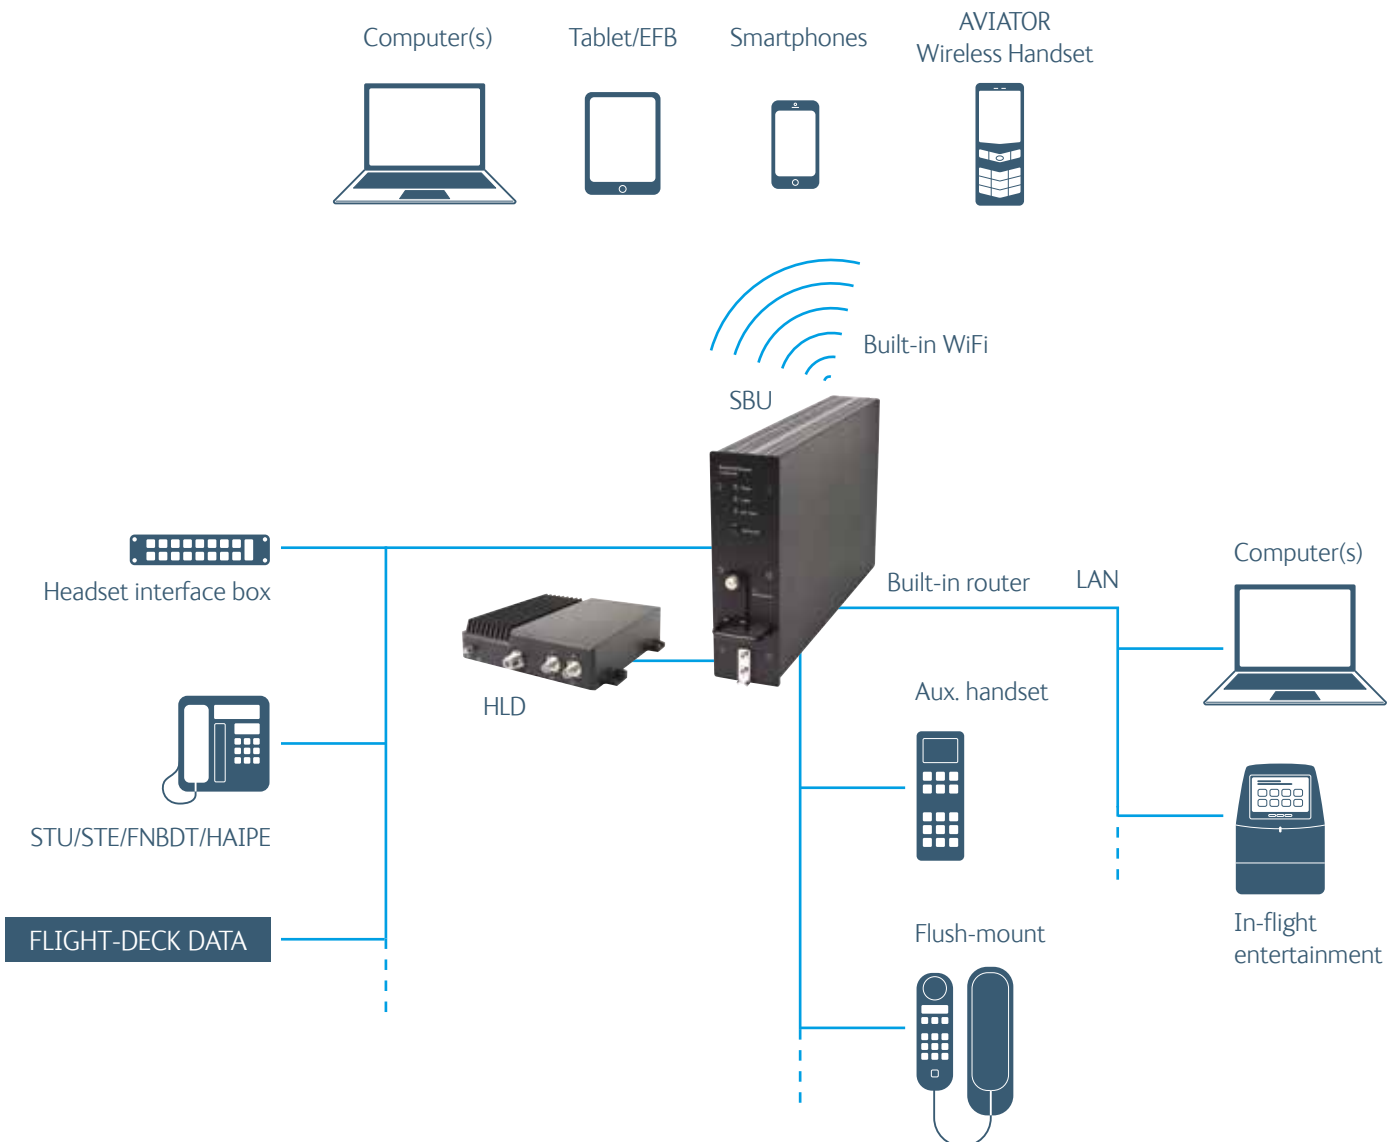



Global Coverage with Inmarsat SwiftBroadband

SwiftBroadband is Inmarsat's latest satellite network with global coverage providing both voice and broadband data. It is the world's leading commercial mobile broadband satellite service.

With three satellites placed in geostationary orbit 36,000 kilometers (22,000 miles) above the Atlantic, Indian and Pacific Oceans respectively, they facilitate reliable global coverage.


Combined with AVIATOR terminals this solution offers high-quality voice and data connectivity with the functionality of traditional terrestrial networks.

SwiftBroadband (HGA)


Cobham's AVIATOR 350 is engineered to take advantage of the latest communication technologies, such as, SwiftBroadband for increased functionality, reliability and connectivity. The SwiftBroadband background data and SwiftBroadband low-cost voice channel allow users to access a shared data channel and a compressed high quality voice channel at the same time.

AVIATOR 350 is an Inmarsat SwiftBroadband HGA (Class 6) System supporting:

- Single Channel SwiftBroadband
- Circuit-switched standard voice
- Background IP up to 432 kbps
- Streaming IP at 8/16/32/64/128 kbps
- SB X-Stream services
- ISDN service or 3.1 kHz audio

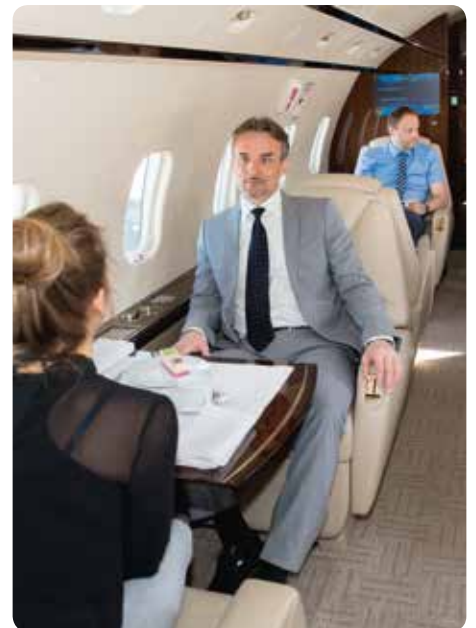

COBHAM SATCOM HAS DEVELOPED BOTH THE SATCOM SYSTEMS AND THE NETWORK GROUND INFRASTRUCTURE

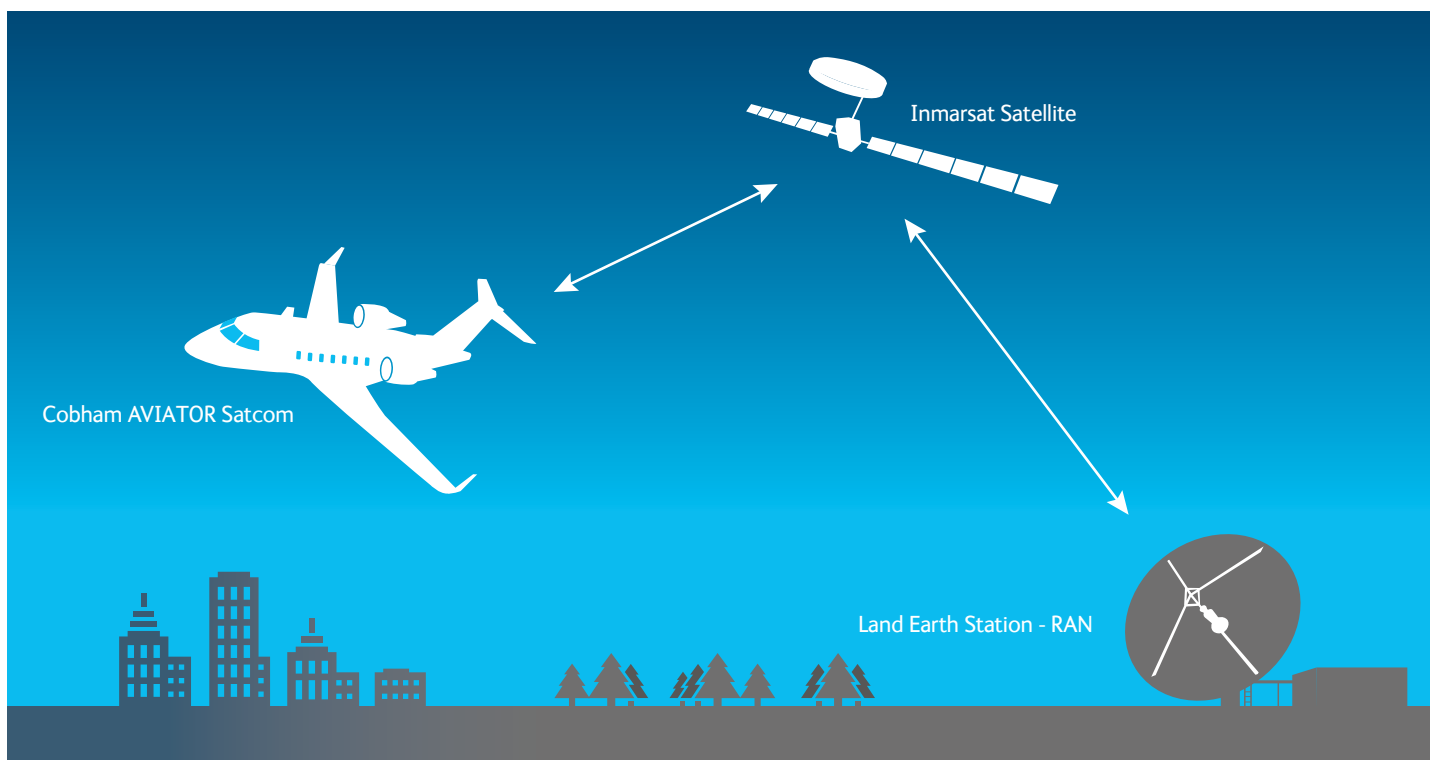



SwiftBroadband Unit (SBU)



Features

- Up to 8 simultaneous voice calls
- IP Packet or streaming SwiftBroadband data
- Ethernet connectivity
- Built-in router with six ethernet interfaces
- Built-in wireless access point
- Low weight and power consumption
- Compact 2 MCU size
- No forced cooling required
- Easy integration
- FAA PMA

Specifications

| | |
|--------------------|---|
| Part Number | 405040A |
| Dimensions | |
| Total L / W / H | 320.5 / 193.5 / 57.2 mm 12.62 / 7.62 / 2.25 in |
| Mass | 2.8 kg / 6.2 lbs |
| Power | 28 V DC, 30 W typ. Max 83 W |
| Altitude | MSL to 55,000 ft |
| Temperature | -25 C to +55 C |
| Connectors | |
| Rear | ARINC 404A |
| Front | RJ-45 |

Environmental Qualification

DO-160E

[(A1)(F1)X]CAB[SB2M]ExxxxZ[AB]A[RB][ZC]
[RR]M[A3J33]XXAX

High Power Amplifier, Low Noise Amplifier and Diplexer (HLD)



Features

- Small size and low weight
- Powered through SBU - no power wires to HLD required
- No forced cooling required
- FAA PMA

Specifications

| | |
|--------------------|--|
| Part Number | 405016A |
| Dimensions | |
| Total L / W / H | 228 / 200 / 50 mm 8.98 / 7.87 / 1.97 in |
| Mass | 2.6 kg / 5.7 lbs |
| Power | Powered through SBU |
| Altitude | MSL to 55,000 ft |
| Temperature | -55 C to +70 C |

Environmental Qualification

DO-160E

[(A2)(F2)X]BBB[SCL]E[(Y)(W)]XXFXZXXX[ZC]
[RR]M[A3J33]XXAX

Configuration Module (CM)



Features

- Stores system configuration parameters
- Located at the rear of the SBU
- Contains the SIM card
- Configured through SBU web interface
- Contains phone book
- CM may be removed or inserted for easy SBU exchange
- FAA PMA

Specifications

| | |
|--------------------|--|
| Part Number | 405040A-001 |
| Dimensions | |
| Total L / W / H | 47 / 45.5 / 20 mm 1.85 / 1.79 / 0.79 in |
| Mass | 0.07 kg / 0.15 lbs |
| Altitude | MSL to 55,000 ft |
| Temperature | -25 C to +55 C |

Environmental Qualification

DO-160E

[(A1)(F1)X]CAB[SB2M]ExxxxZ[AB]A[RB][ZC]
[RR]M[A3J33]XXAX

AVIATOR 350 Key (HGA)

Software key allowing system use with a High Gain Antenna (HGA)

Part Number 405040A-006